


SPACESAVER DAY USE LOCKERS

Day Use Lockers offer a unique storage solution that combines the durability of steel construction with the aesthetics of a full overlay door in HPL or steel. The large variety of configuration and color options means Day Use Lockers can blend into the overall design of a space, form unique integrated space dividers and islands, or be used to create an eye-catching wall of awareness.

LOCKER FRAME DIMENSIONS

Tiers	1, 2, 3, 4, 5
Columns	1, 2, 3
Frame Heights	24", 36", 54", 60", 72"
Frame Depths*	12", 15", 18", 24"
Frame Widths	12", 15", 18" (24", 30", 36", 45")

*Please note frame depth does not account for 1" of overhang from the full-overlay door + depth of lock (varies by lock type).

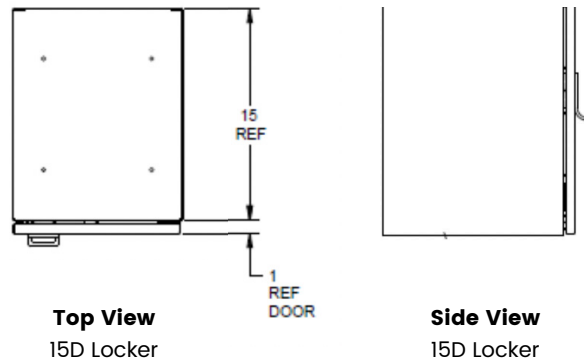


- Lockers can be ordered in single, double, and triple column configurations.
 - Double and triple column lockers use shared tops, bottoms, and internal sides.
- Position of shelves in multi-tier cabinets is fixed.
- Not all combinations of tiers and columns is possible given height and width limitations.
 - The smallest individual opening height is 12."
 - Example: it would not be possible to get a 5 tier locker with a frame height of 36" as it would result in individual opening heights of 7.2."
 - The maximum overall frame width is 45."
 - Example: a locker with 18W openings is NOT available as a 3 column since the width would be 54."
- Drop-in floors are used to access the levelers (note levelers are part of the base).
 - Qty 1 drop-in floor per column included with each cabinet.

CLEAR OPENING SIZES

Opening Height	Nominal Door Width - 2.308"
Opening Width	Nominal Door Height - 1.562"
Opening Depth	Nominal Frame Depth - .096"

Lock catch is built into the locker frame and therefore does not impede the clear opening

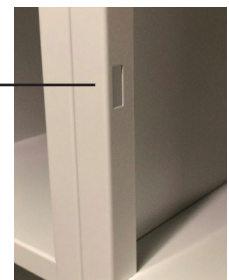

LOCKER FRAME DIMENSIONS

- Doors are full overlay.
- Concealed, Euro style hinges.
 - Hinges are adjustable to ensure matching reveals for all doors in a locker frame or even a bank of lockers.
- High Pressure Laminate (HPL) doors are ¾" thick, feature Wilsonart selected design on both sides, and 3mm color matched PVC edge banding.
 - Note: Due to HPL sheet yields, orders with less than 30 HPL doors are subject to a Minimum Order Quantity Charge.
- Steel doors are double walled, 20 gauge.
- Default hinge placement is on right side of door, with lock on left.
- Doors do not have individual handles other than what is provided by the lock.
- Individual doors in a single locker frame can be different colors.
 - Up charge per color change applies.
- Individual doors in a single locker frame can be different colors.
- Door widths can NOT exceed door heights.

NOTE: In Configura, door heights will round up to the nearest 3" increment .


LOCK DETAILS

- Locks are centered vertically on the door.
- Default lock placement is on the left side of the door.
- Locks are intended for 'shared-use' applications.
- Manager and Programming keys are required.
- Default lock placement is on the left side of the door.
 - Note: Configura will add 1 of each key per order. Additional keys can be pick-listed.
- ADA user key available for some lock styles via pick list.


Lock Type	Key Part Numbers	ADA User Key Part Numbers
Digilock Numeris Aspire Keypad	DULKNUMPRG, DULKNUMMGR	DULKNUMUSER
Digilock Axis Next Keypad	DULKNXTPRG, DULKNXTMGR	DULKNXTDKUSER
Digilock DAK1-ATS1 Keypad	DULKDKPRG, DULKDKMGR	DULKNXTDKUSER
Zephyr Keypad	DULKZPCTRL, DULKZPMGR	-
Digilock Mechanical Combo	DULKCOMBOCODEKEY, DULKCOMBOMGRKEY, DULKCOMBOREMOVEKEY	-
Ojmar Mechanical Combo	DULKOJMARMMASTER	-
Digilock Hasp	-	-
Keyed Different Cam lock	DULKKEYMASTER	-

BASE DETAILS

- Bases are recommended to raise the height of the bottom opening as well as provide leveling capabilities.
- Threaded appliance levelers in each corner.
- Height is 4"
- Bases can be ordered flush or with 1" recess to create a toe kick.
 - Note: The flush base is flush with the frame of the locker, full overlay door overhangs approximately 1" from the front of the locker frame.

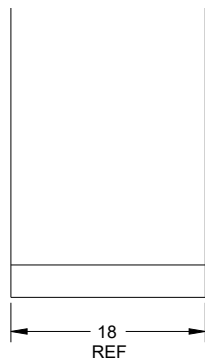

Side View
Flush Base

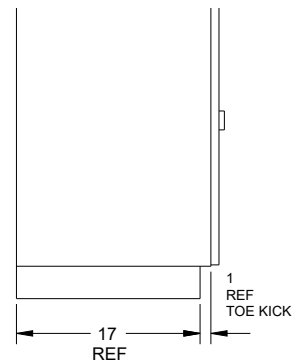

Side View
Recessed Base

SHELF DETAILS

- Shelves are 18 gauge steel.
- Factory installed 12 inches from the top of the opening.
- Only available in openings greater than 28" H

INTERIOR HOOKS



- Hooks are riveted into place in assembly at the factory.
 - Single hook can be placed on right, left, and/or back wall.
 - Hooks positioned 3 3/4" below the nearest horizontal surface

VENTED BACKS



- Tags are adhesive backed and applied in the field.
- Black plastic tag with white etched font.
 - Number scheme must be specified in Configura

NUMBER TAGS



- Rear venting pattern.
- Vertical slits are 1/4" Wide x 2" Tall and spaced 1/2" apart.

TRIM

Refer to General Locker Trim Planning Guide. This includes sloped tops, corner filler, and vertical trim.